




For protection of Electronic Telephone Systems, PBX's, KSU's and Key Systems .

FEATURES & BENEFITS

- UL 497 Listed for primary protection
- Utilizes industry standard 5-pin protector modules
- 110 IDC termination input and output
- High-impact, fire retardant housing
- Units can be cascaded to provide for expansion
- Compact, lightweight design
- AQL Incoming Inspection Process
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)

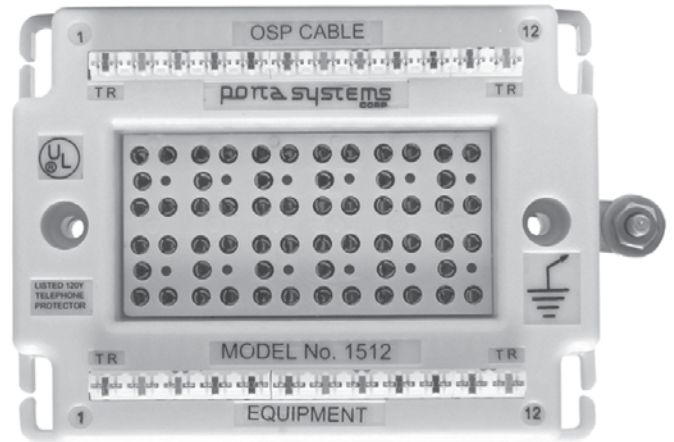

ORDERING INFORMATION

Model#	Pair Count	Input	Output	Modules	Module Model#
1512	12	110	110	None	NA
1512GT	12	110	110	230V Gas Tube	175BCXN-230
1512SS240	12	110	110	240V Solid State	115SCN-240

1512

5-PIN PRODUCTS



BUILDING ENTRANCE PROTECTOR



110 Termination



MECHANICAL SPECIFICATIONS FOR 1512 BUILDING ENTRANCE TERMINAL:

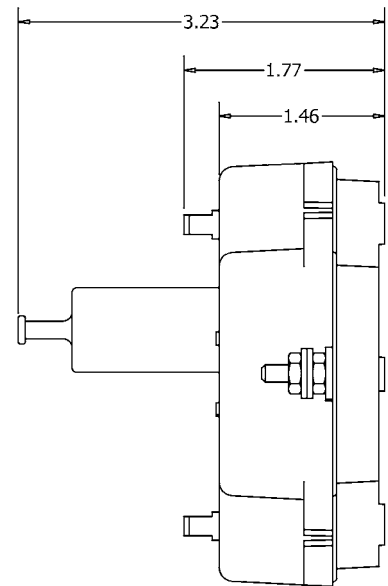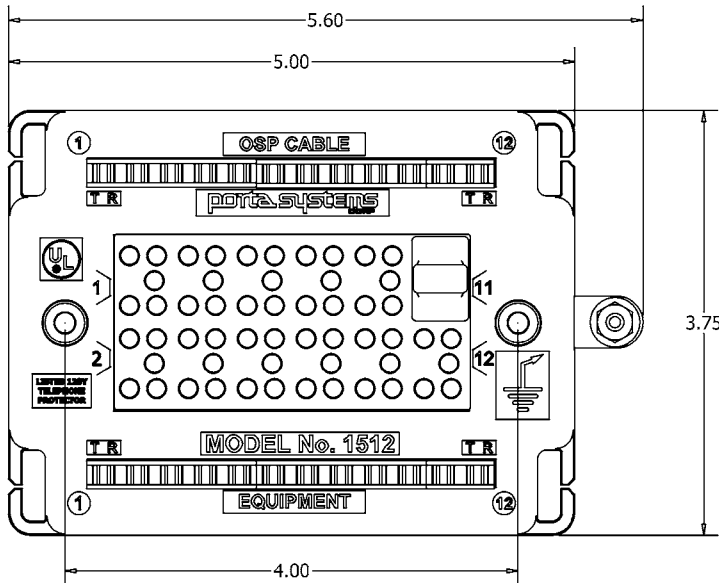

Pair Count	Dimensions (height x width x depth)	Weight (approx.)*
12 PAIR	3.75" x 5.6" x 3.3" (9.5 cm x 14.2 cm x 8.2 cm)	1 lbs.

* Weight - Add approx 0.5 oz per installed module.



For more information contact:
 141 Rodeo Dr.
 Edgewood, NY 11717
 T. 631.789.5000
 Toll Free 888.844.4720
 F. 631.789.5063
 sales@tiinettech.com
 www.tiinettech.com