




For protection of Electronic Telephone Systems, PBX's, KSU's and Key Systems .

FEATURES & BENEFITS

- UL 497 Listed for primary protection
- Utilizes industry standard 5-pin protector modules
- 66 IDC termination input and output
- High-impact, fire retardant housing
- Units can be cascaded to provide for expansion
- Compact, lightweight design
- AQL Incoming Inspection Process
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)

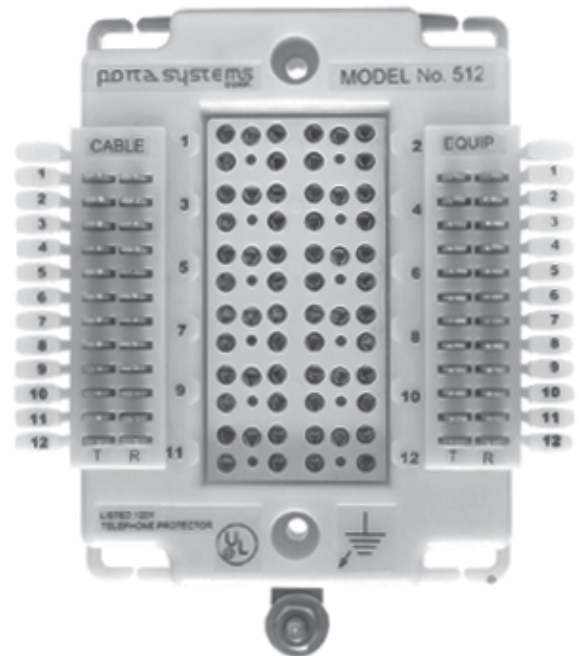

ORDERING INFORMATION

Model#	Pair Count	Input	Output	Modules	Module Model#
512	12	66	66	None	NA
512GT	12	66	66	230V Gas Tube	175BCXN-230
512SS240	12	66	66	240V Solid State	115SCN-240



BUILDING ENTRANCE PROTECTOR

66 Termination



porta.systems
Products

MECHANICAL SPECIFICATIONS FOR 512 BUILDING ENTRANCE TERMINAL:

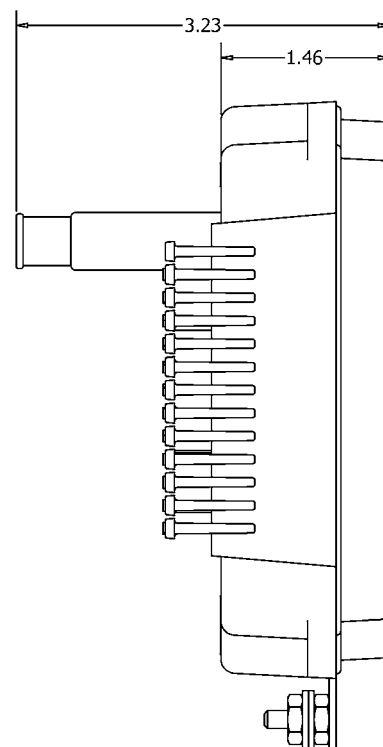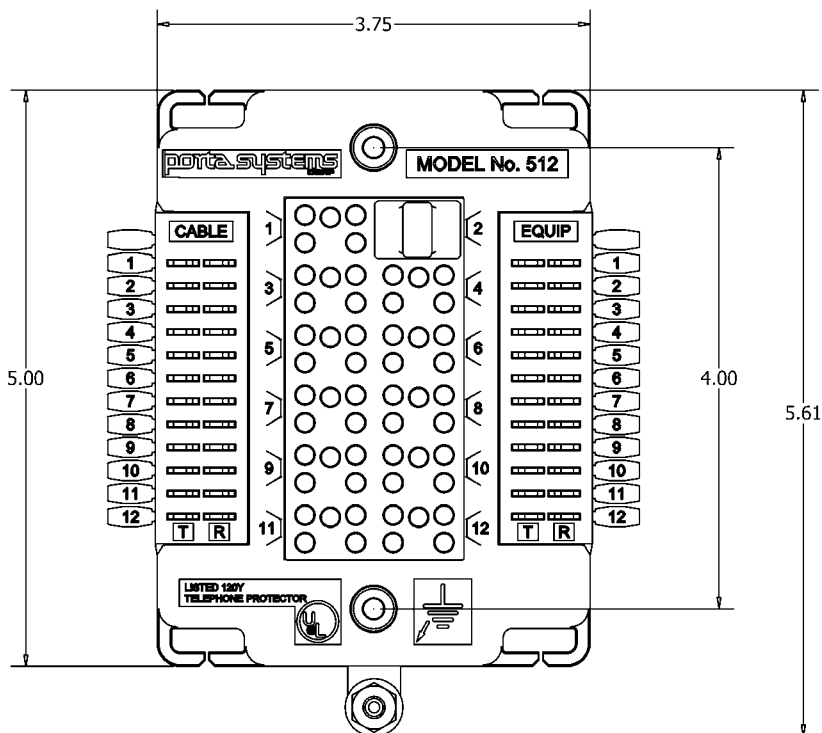

Pair Count

Dimensions (height x width x depth)

Weight (approx.)*

12 PAIR

5.6" x 3.75" x 3.3" (14.2 cm x 9.5 cm x 8.2 cm)

2 lbs.

* Weight - Add approx 0.5 oz per installed module.

For more information contact:

141 Rodeo Dr.

Edgewood, NY 11717

T. 631.789.5000

Toll Free 888.844.4720

F. 631.789.5063

sales@tiinettech.com

www.tiinettech.com